

FQSS 213-Q

Diode Pumped Passively Q-Switched Solid State Laser

- **213 nm**
- **Pulsed (≤ 1.0 ns)**
- **Up to 2.5 μ J**
- **Up to 20 kHz**
- **External and Internal Trigger**
- **Free Beam**
- **Single Pulse Operation**



biology · biomedicine · chemistry · analytics


Optical Data		FQSS213-Q1	FQSS213-Q2	FQSS213-Q3	FQSS213-Q4_1k
	Wavelength	213 nm			
	Pulse Energy	> 0.05 μ J @15kHz	> 0.1 μ J @10kHz	> 1.5 μ J @1kHz	> 2.5 μ J @1kHz
	Peak Power	> 0.05 kW @15kHz	> 0.1 kW @10kHz	> 1.5 kW @1kHz	> 2.5 kW @1kHz
	Pulse Repetition Rate	\leq 20 kHz	\leq 10 kHz	\leq 2.5 kHz	\leq 1 kHz
	Pulse Width, FWHM	\leq 1.0 ns			
	Polarization Ratio	> 100:1 horizontal			
	Pulse Energy Drift ¹⁾	< \pm 5 %	< \pm 5 %	< \pm 5 %	< \pm 5 %
	Pulse-To-Pulse RMS ²⁾	< 4% @15kHz	< 2% @10kHz	< 2% @1kHz	< 2% @1kHz
	Laser Classification	4 / IV	4 / IV	4 / IV	4 / IV
Optical Output	Spatial Mode	TEM ₀₀ (Main Axis Divergence Ratio < 3.5)			
	Beam Divergence, 2 Θ	< 2.0 mrad	< 2.0 mrad	< 2.5 mrad	< 3.0 mrad
	Beam Diameter	400 \pm 200 μ m	400 \pm 200 μ m	450 \pm 200 μ m	450 \pm 200 μ m
Electrical Data	Power Consumption	15 W (max.40 W)	17 W (max.40 W)	20 W (max.70 W)	22 W (max.80 W)
	Operating Voltage	12 V DC			
	Line Voltage	90 - 240 V AC (50 – 60 Hz)			
	Marking				
Interfaces	RS 232, USB				
	External Trigger (TTL, rising edge) single shot (pulse on demand) – max. repetition rate				
	Interface for TTL-control and power monitor				
Miscellaneous	Warm-up Time	< 5 min			
	Operating Temperature	18 - 38 °C			
	266nm satellite	The satellite's pulse energy is < 0.1 μ J and the angular deviation from the 213 nm laser beam is approx. 0.9 degrees.			
Options	Stand-alone system (incl. key-switch, heat-sink and manual shutter; CDRH compliant)				
	Synchronization signal output (rise time < 2 ns)				
	Manual shutter or electrical beam blocker				
	External beam expander (e.g. 3x) on request				

¹⁾ Drift over 6 hours, energy averaged over 10 sec after 5 min of continuous operation, temperature variation \pm 3 °C and < 3 °C/hour.


²⁾ RMS over 1000 pulses after 5 min of continuous operation.

Dimensions


Laser Head: 220 x 54 x 39 mm

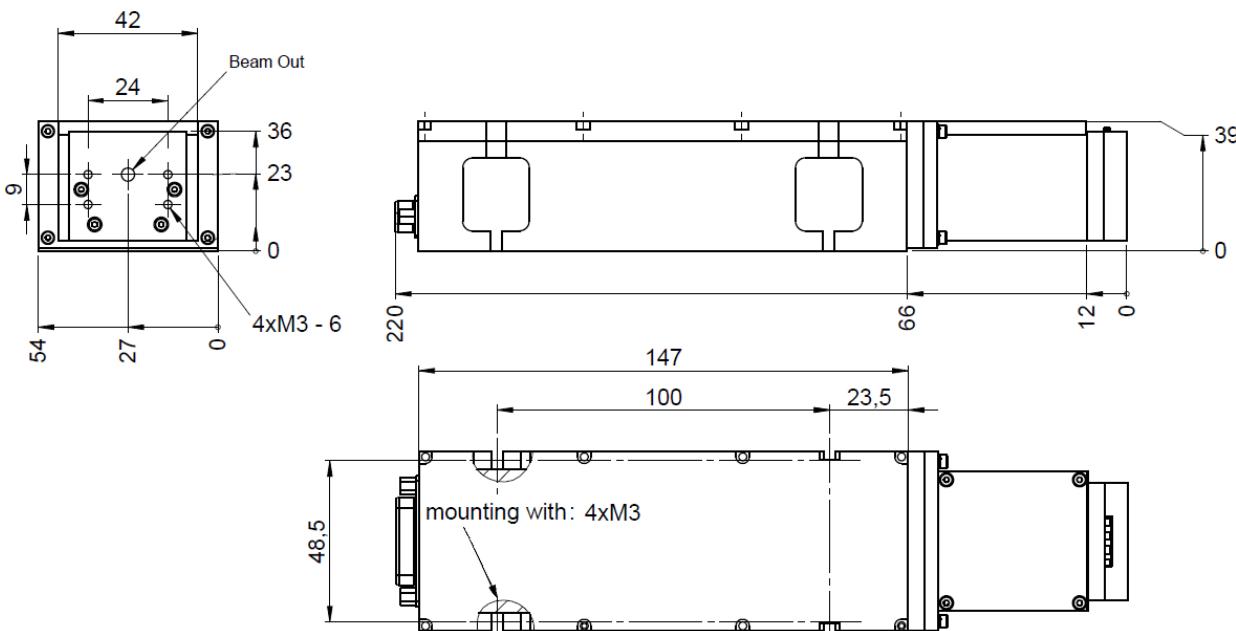

Controller Stand-Alone: Q1, Q2: 135 x 115 x 64 mm; Q3, Q4: 175 x 115 x 64 mm


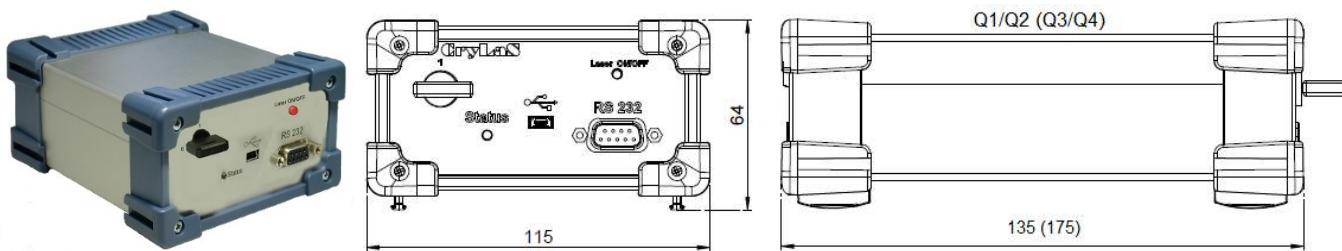


Controller OEM: Q1, Q2: 133 x 130 x 35/50 mm; Q3, Q4: 173 x 130 x 35/50 mm

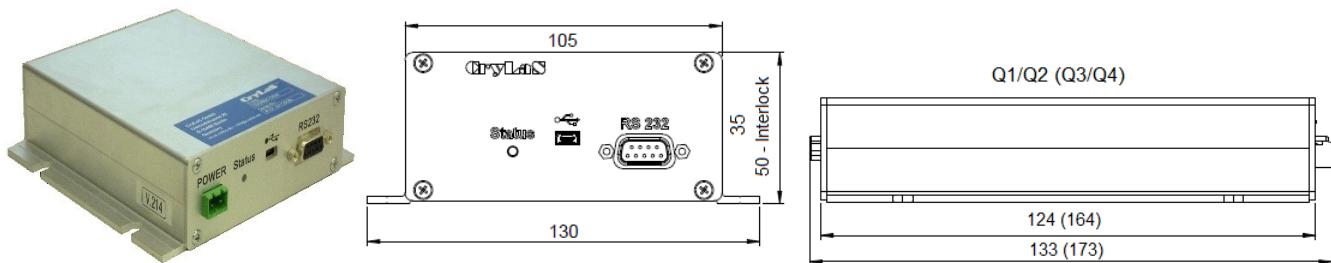

Laser Safety Label

The FQSS 213-Q lasers are class 4 / IV according to IEC 60825-1:2014



Q1 series

Q2 series

Q3 series

Q4 serie

